

LED FLOOD LIGHT

BTFL-TAB-30W

Specifications

Part No.TG3B-3


Optical Data

Model	BTFL-TAB-30W
Wattage	30W
LED Type	SMD Bridgelux / Lumileds (30leds)
Efficiency	130-150Lm/W
Luminous Flux	3900-4500Lm
CCT	3000K/4000K/5700K/6500K
Beam Angle	120°
CRI	>70Ra (80% Optional)
System Efficiency	>90 -95 %



Electrical Data

Driver	DONE /Meanwell (Optional)
Input Voltage	AC220-240V/AC100-277V
Power Frequency Output	50/60Hz
Voltage	DC28- 36 V
Power Efficiency	>92%
Power Factor	>0.95
Total Harmonic Distortion	<10% ,15%
Surge Protection	4kv (10/20kv as optional)

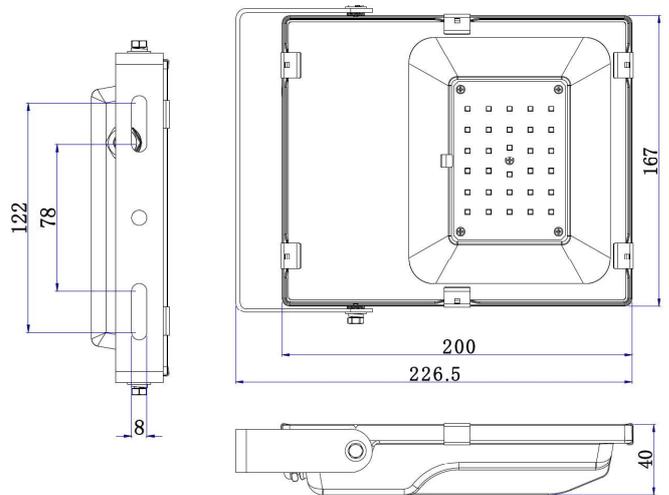

Others

IP	IP65
Lifetime(L70 Standard)	50,000 hours
Heat Radiator	die-cast aluminum
Lens Material Product size	Glass L200 xW167x 40 mm.
Net weight	2.0 kg.
Gross Weight	2.4 kg.
Inner box size	L2 60 XW195 XH50mm
Outer box size (20pcs)	L535 XW405 XH480 mm
Dimmable	0-10/P WM as Optional
Warranty	2-5 years

